

DESCRIPTION

Solenoid valve 2 way normally open with servo-assisted diaphragm


CONSTRUCTION

Body and cover	Brass
Armature tube	up to G1" Stainless steel over G1" Brass
Plunger and core	Stainless steel
Springs	Stainless steel
Seal material	NBR FPM EPDM




FEATURES

- Minimum differential pressure 0.15 bar
- Maximum allowable pressure*: 25 bar (up to G1"1/2)
20 bar (over G"1/2)
- Maximum fluid viscosity 25cSt (mm²/s)
- Ambient temperature: with class F coil -10°C +55°C
with class H coil -10°C +80°C
- Preferred mounting position with vertical coil above



4

OPTIONS : Electroless nickel-plating
Explosion proof coil according to ATEX - EExmII Series 7 (up to G1")

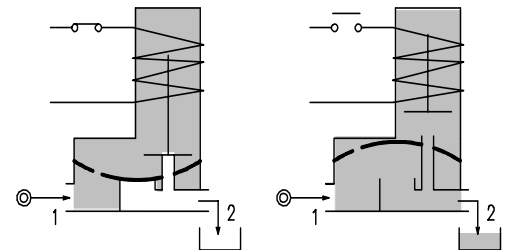

CODE ① ②	Connection G ISO 228	Orifice mm	KV m ³ /h	Differential pressure bar			Nominal power			Coil		Seal ①	Temp. range °C
				Min	Max		AC Inrush	VA Holding	DC Watt	Series	Width		
					AC	DC							
E207B.....10///.....	1/4"	10	1.5	0.15	15	15	12	8	6.5	3	22	NBR=B	-10 +90
E207C.....10///.....	3/8"	10	1.7	0.15	15	15	12	8	6.5	3	22		
E207C.....12///.....	3/8"	12	2.2	0.15	15	15	12	8	6.5	3	22		
E207D.....12///.....	1/2"	12	2.5	0.15	15	15	12	8	6.5	3	22	EPDM=E	<+140
E207E.....18///.....	3/4"	18	5.5	0.15	13	13	12	8	6.5	3	22		
E207F.....25///.....	1"	24	10.2	0.15	10	10	12	8	6.5	3	22		
E207G.....30///.....	1"1/4	30	15	0.15	10	10	12	8	6.5	3	22	FPM=V	-10 +130
E207G.....37///.....	1"1/4	37	18	0.15	10	10	20	15	10	2	30		
E207H.....37///.....	1"1/2	37	21	0.15	10	10	20	15	10	2	30		
E207I.....50///.....	2"	50	36	0.15	10	10	20	15	10	2	30	NBR=B	-10 +90
E207MB75///.....	2"1/2	75	75	0.3	10	10	20	15	10	2	30		
E207RB75///.....	3"	75	84	0.3	10	10	20	15	10	2	30		


- ① Seal Example: E207DB12///301 NBR seal
- ② Coil Coil 24V DC
- ③ NBR seals - Only for neutral liquid fluid

* REMARK: The maximum allowable pressure PS for steam is 2,5bar (gauge pressure)

COIL	Alternating Current ~50/60Hz Volt							Direct Current Volt			Electrical connection	Connectors
	12	24	48	110	220 230	240	380	12	24	48		
Series 3 Width 22 Code ②	30A	30B	30C	30D	30E	30F	30G	300	301	302	DIN 46244	PG9 code 10348000
Series 2 Width 30 Code ②	20A	20B	20C	20D	20E	20F	20G	200	201	202	DIN 43650A	PG9 code 10349000


DESCRIPTION
 Class F insulation
 Voltage tolerance
 AC +15% -10%
 DC ±10%
 Protection class
 IP65 with connector fitted
 IP00 without connector
 Continuous service ED100%

OPTIONS
 Class H insulation
 Cable attached
 Special coil powers
 Special coil voltages

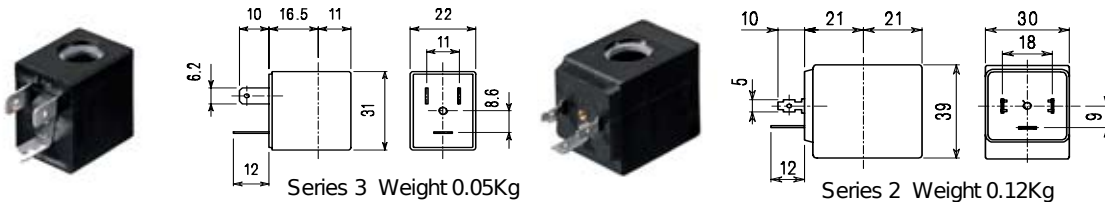


SPARE PARTS LIST

1. Coil fixing nut
2. Coil
3. Seal assembly
4. Armature tube with core
5. Diaphragm assembly
6. Speed control valve
7. Water hammering reducer
Ø0.8-Ø1-Ø1.2

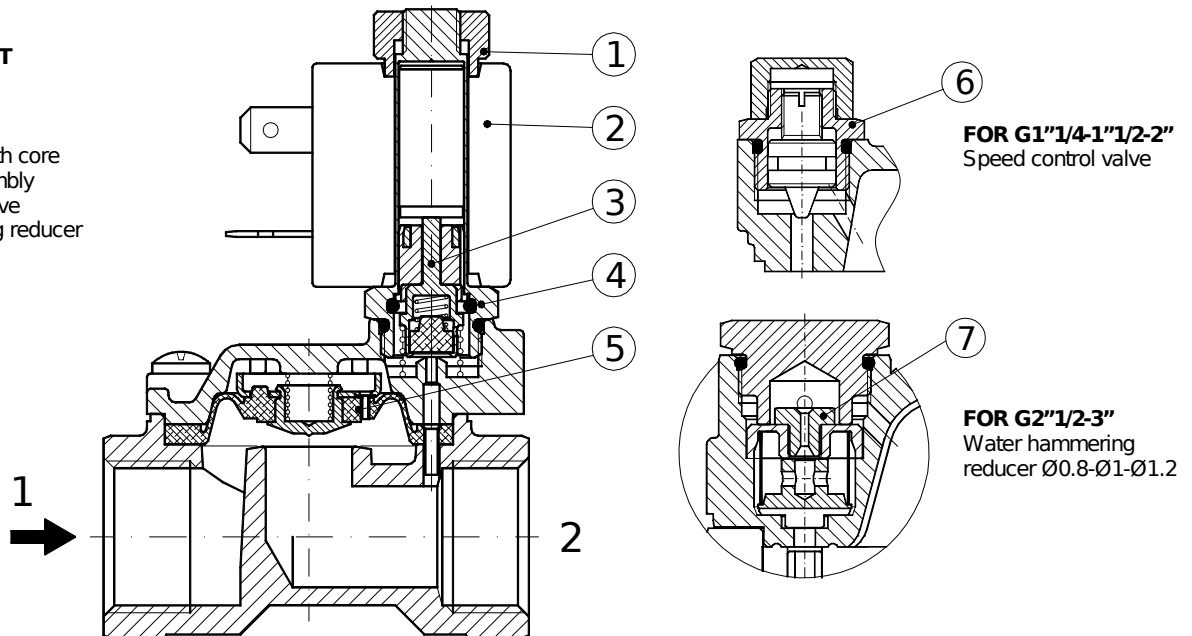

OVERALL DIMENSION

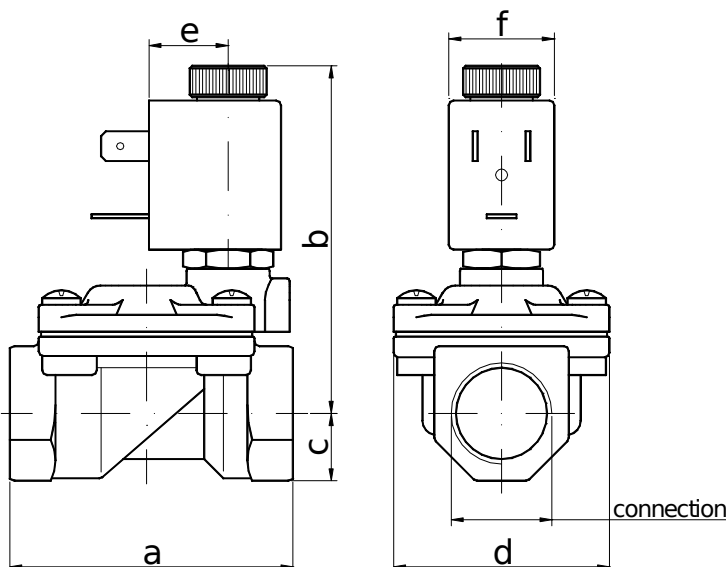

CONNECTION	a	b	c	d	e	f	Weight Kg
G1/4" 10	49	64	11	32	16	22	0.25
G3/8" 10	49	64	11	32	16	22	0.25
G3/8" 12	59	73	14	45	16	22	0.45
G1/2"	59	73	14	45	16	22	0.45
G3/4"	79	75	18	55	16	22	0.66
G1"	96	85	20	72	16	22	1.05
G1'1/4 Ø30	119	96	25	85	16	22	1.80
G1'1/4	142	105	28	102	21	30	2.95
G1'1/2	142	105	28	102	21	30	2.74
G2"	158	119	35	119	21	30	4.32
G2'1/2	226	135	51	169	21	30	10
G3"	226	135	51	169	21	30	9.65