



Pompe da drenaggio indicate per svuotamento di pozzi neri o cisterne, per giardinaggio; completamente in materiale anticorrosivo.

Drainage pump for emptying pits and cisterns, for gardening; completely constructed in anticorrosive material.

Bombas de drenaje indicadas para vaciar fosas sépticas o cisternas, para la jardinería; completamente de material anticorrosivo.

Pompes de drainage indiquées pour le vidage de fosses d'aisances ou citernes, pour le jardinage; entièrement en matériau anticorrosion.




DP 40





DP 60



**CARATTERISTICHE COSTRUTTIVE / CONSTRUCTION FEATURES  
CARACTERÍSTICAS CONSTRUCTIVAS / CARACTÉRISTIQUES D'EXÉCUTION**
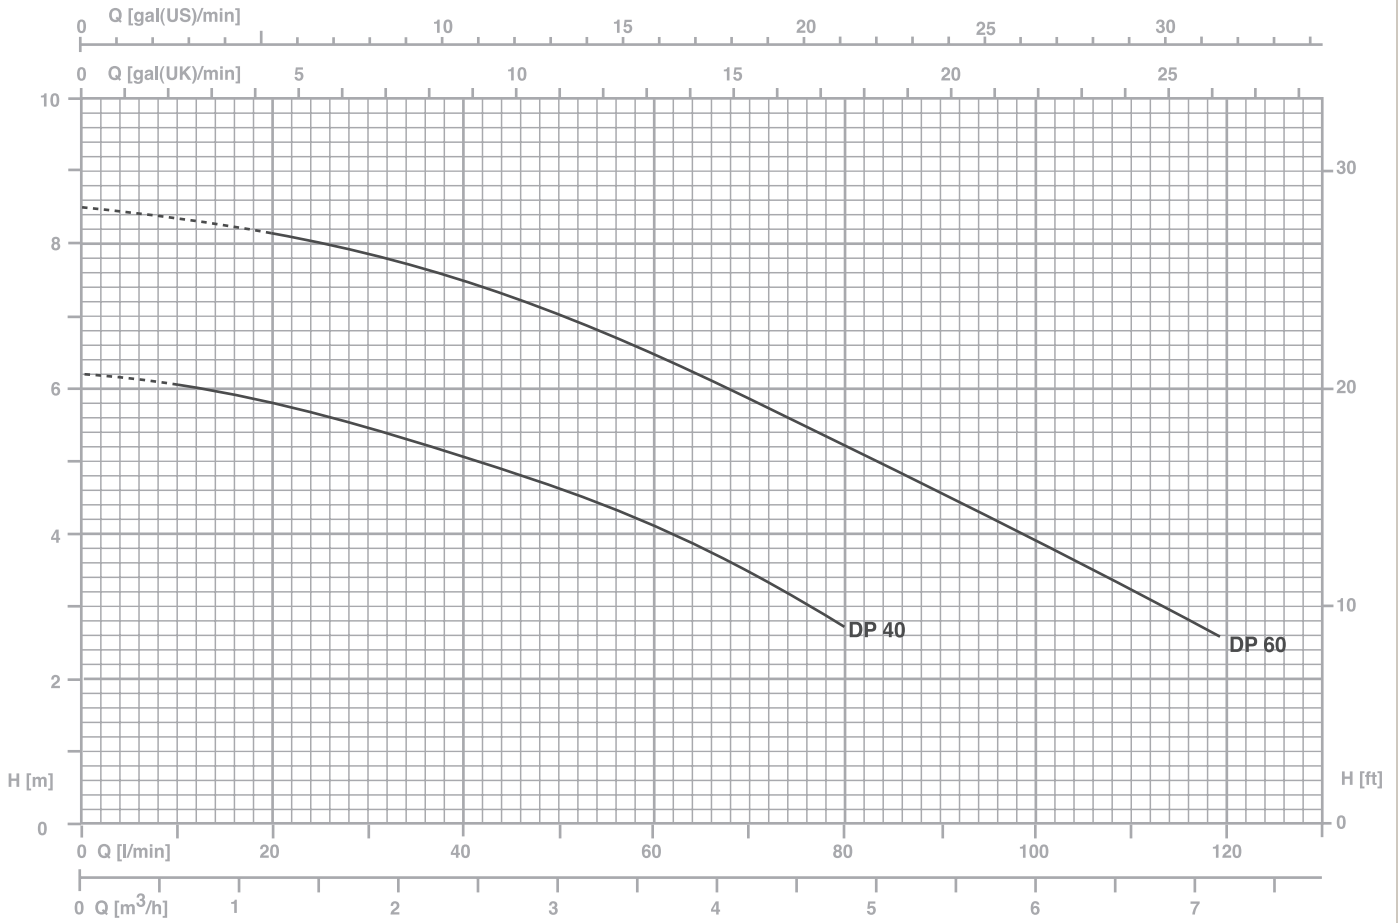
<b>Corpo pompa</b>	polipropilene
<b>Pump body</b>	polypropylene
<b>Cuerpo bomba</b>	polipropileno
<b>Corps de pompe</b>	polypropylène
<b>Girante</b>	
<b>Impeller</b>	Noryl®
<b>Rodete</b>	
<b>Turbine</b>	
<b>Tenuta meccanica</b>	doppia tenuta a labbro
<b>Mechanical seal</b>	double lip seal
<b>Sello mecánico</b>	doble sello
<b>Garniture mécanique</b>	double joint d'étanchéité à lèvres
<b>Albero motore</b>	acciaio AISI 416 con boccola in ceramica
<b>Motor shaft</b>	stainless steel AISI 416 with ceramic bush
<b>Eje motor</b>	acero AISI 416 con casquillo de cerámica
<b>Arbre moteur</b>	acier AISI 416 avec bague en céramique
<b>Passaggio corpi solidi</b>	
<b>Passage of solids</b>	Ø max 4 mm
<b>Pajo de solidos</b>	
<b>Passage corps solides</b>	
<b>Profondità di immersione</b>	
<b>Depth of immersion</b>	max 5 m
<b>Profundidad inmersión</b>	
<b>Profondeur immersion</b>	
<b>Temperatura del liquido</b>	
<b>Liquid temperature</b>	0 - 40 °C
<b>Temperatura del liquido</b>	
<b>Température du liquide</b>	
<b>Cavo</b>	
<b>Cable</b>	H07 RNF, 10 m
<b>Cable</b>	
<b>Câble</b>	
<b>G</b>	galleggiante float switch flotador flotteur
<b>MOTORE / MOTOR / MOTOR / MOTEUR</b>	
<b>Motore 2 poli a induzione</b>	3~ 230/400V-50Hz
<b>2 pole induction motor</b>	1~ 230V-50Hz
<b>Motor de 2 polos a inducción</b>	con termoprotettore with thermal protection con protección térmica
<b>Moteur à induction à 2 pôles</b>	avec protection thermique
<b>Classe di isolamento</b>	
<b>Insulation class</b>	F
<b>Clase de aislamiento</b>	
<b>Classe d'isolation</b>	
<b>Grado di protezione</b>	
<b>Protection degree</b>	IP68
<b>Grado de protección</b>	
<b>Protection</b>	

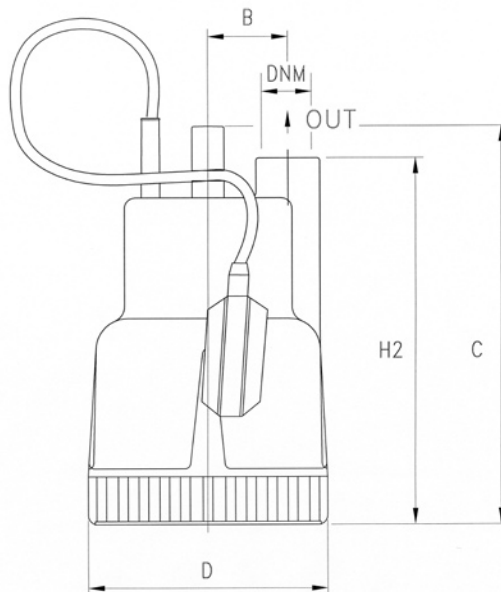

TYPE	W	AMPERE	Q (m³/h - l/min)							
		1~	0	1,2	2,4	3,6	4,8	6	7,2	
		1x230 V 50 Hz	0	20	40	60	80	100	120	
			H (m)							
<b>DP 40 G</b>	200	1	6,1	5,7	5	4,2	2,5	-	-	
<b>DP 60 G</b>	400	2,1	8,5	8,1	7,6	6,7	5	3,9	2,6	



TYPE	DIMENSIONS (mm)								
	B	C	D	H2	DNM	I	L	M	
<b>DP 40 G</b>	50	250	150	230	1" G	170	200	320	3.2
<b>DP 60 G</b>	50	250	150	230	1" G	170	200	320	4.2